


TN-M18-H1147

HF Read/Write Head

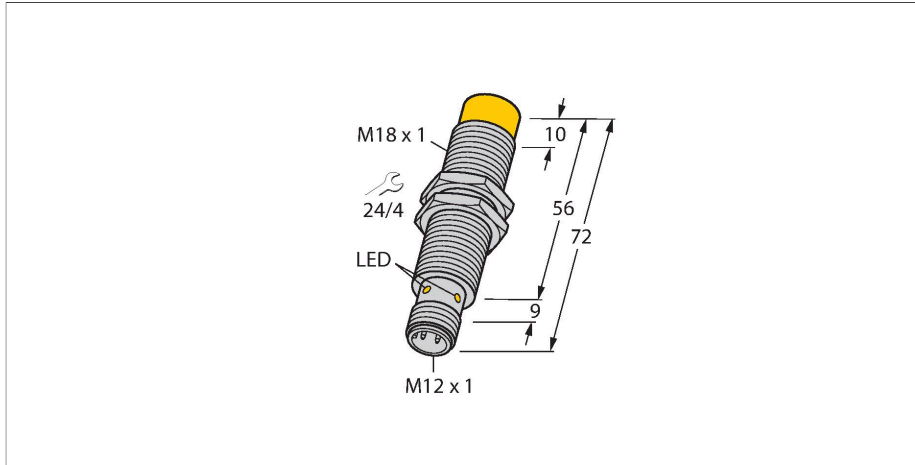


Technical data

Type	TN-M18-H1147
ID	7030002
Approvals	CE UKCA UL
Radio approvals	EU/RED: Europe UK SI 2017/1206: United Kingdom FCC: USA IC: Canada MIC: Japan
Electrical data	
Operating voltage	10...30 VDC
DC rated operational current	≤ 75 mA
inrush current	700 mA For: 1 ms
Data transfer	Inductive coupling
Technology	HF RFID
Operating frequency	13.56 MHz
Radio communication and protocol standards	ISO 15693 NFC Typ 5
Read/Write distance max.	45 mm
Output function	4-wire, Read/Write
Mechanical data	
Mounting conditions	Non-flush
Ambient temperature	-25...+70 °C
Design	Threaded barrel, M18 x 1
Dimensions	72 mm
Housing diameter	Ø 18 mm
Housing material	Metal, CuZn, Chrome-plated
Active area material	Plastic, PA12-GF30
Vibration resistance	55 Hz (1 mm)


Features

- Threaded barrel, M18 x 1
- Chrome-plated brass
- Powered and operated only via connection to BL ident interface module
- M12 x 1 connector, connection only via BL ident extension cable


.../S2503 Connectors



.../S2500 Connectors



.../S2501 Connectors



Functional principle


The HF read/write devices operating at a frequency of 13.56 MHz form a transmission zone, the size of which (0...500 mm) varies depending on the combination of read/write device and tag used.

Technical data

Shock resistance	30 g (11 ms)
Protection class	IP67
Electrical connection	M12 × 1
MTTF	391 years acc. to SN 29500 (Ed. 99) 20 °C
Power-on indication	LED, Green
Packaging unit	1

The read/write distances mentioned here only represent standard values measured under laboratory conditions, free from any influences caused by surrounding materials. The read/write distances of the tags for mounting in metal TW-R**-(MF) were determined in metal. Attainable distances may vary by up to 30 % due to component tolerances, mounting conditions, ambient conditions and material qualities (especially when mounted in metal). Testing of the application under real operating conditions is therefore essential, especially with on-the-fly reading and writing!

Mounting instructions/Description



Diameter active area B Ø 18 mm

non-flush mounting

LED	Color	Status	Meaning
1	OFF	OFF	Operating voltage switched off
	GREEN	ON	Operating voltage switched on
	GREEN	FLASHING (1 Hz)	HF field switched off
	GREEN	FLASHING (2 Hz)	Tag in detection range

Dimensions	Type designation	Read-write distance		Transfer zone		Minimum distance between two read-write heads [mm]
		Recommended (mm)	max. [mm]	length max. [mm]	width offset max. [mm]	
	TW-R7.5-B128 7030231	8	16	20	10	54
	TW-R9.5-B128 7030252	9	18	22	11	54
	TW-R9.5-K2 7030558	9	20	23	11	54

	TW-R16-B128 6900501	12	23	26	13	54
	TW-R20-B128 6900502	10	22	26	13	54
	TW-R20-B320 100005244	10	22	26	13	54
	TW-R20-K2 6900505	12	20	24	12	54
	TW-R30-B128 6900503	10	25	34	17	54
	TW-R30-B320 100005245	10	25	34	17	54
	TW-R30-K2 6900506	16	31	32	16	54
	TW-R50-B128 6900504	20	41	70	35	54
	TW-R50-B320 100005246	20	41	70	35	54
	TW-R50-K2 6900507	12	30	60	30	54
	TW-BD10X1.5-19-K2 6901381	8	17	22	11	54
	TW-SPP18X1-B128 6901062	5	16	22	11	54


<p> $\varnothing 29,9$ 10 </p>	TW-R30-M-B128 7030210	6	14	16	8	54
<p> $\varnothing 49,9$ 15 </p>	TW-R50-M-B128 7030209	10	22	22	11	54
<p> $\varnothing 29,9$ 10 </p>	TW-R30-M-K2 7030206	6	13	10	5	54
<p> $\varnothing 49,9$ 15 </p>	TW-R50-M-K2 7030229	10	22	32	16	54
<p> $\varnothing 4$ 21,7 </p>	TW-R4-22-B128 7030237	5	13	20	10	54
<p> $\varnothing 0,8$ 54 86 </p>	TW-L86-54-C-B128 6900479	15	39	74	37	54
<p> $\varnothing 10$ $\varnothing 9,9$ 4,5 </p>	TW-R10-M-B146 7030545	5	12	14	7	54
<p> $\varnothing 10$ 4,5 12 11,8 </p>	TW-R12-M-B146 7030500	5	12	14	7	54
<p> 18 18 </p>	TW-L18-18-F-B128 7030634	15	30	29	14	54
<p> $\varnothing 17,5$ $\varnothing 20,6$ 19 M8 x 1.25-6h 22,4 11 </p>	TW-B58x1.25-19-K2 7030638	7	15	18	9	54

Accessories

BSN 18

69472


Mounting clamp for threaded barrel sensors; material: PA66-GF



BST-18N

6947215


Mounting clamp for threaded barrel sensors, without dead-stop; material: PA6



QM-18

6945102


Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M24 x 1.5. Note: The switching distance of the proximity switches may change when using quick-mount brackets.



BST-18B

6947214


Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6



BSS-18

6901320


Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene



BSS-SPV2

6901316


Weld-on plate for BSS mounting brackets



BSS-TSM 2 pcs

6901323

DIN rail nut for BSS and BSM mounting clips, for mounting on DIN rails



MW-18

6945004

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

